

EASTERN GEOTECHNICS LIMITED

P.O.BOX 22215 DAR ES SALAAM.

Email: projects@easterngeotechnics.co.tz

Contacts: +255 760 594 570 | +255 760 044 560

GEOTECHNICAL INVESTIGATION SERVICES PROVIDER

About Us

Eastern Geotechnics Limited was established in 2024 is the one of the Tanzania's fast growing Geotechnical Investigation Contractors that provide high quality professional Geotechnical Investigations, and testing to its clientele across Tanzania.

Our vision

To build an organization that will become the leading and respected service provider within East Africa and beyond.

Our mission

To maintain high standards of leadership, quality of our services, pro-active customer service, competence in value and technology.

Core value

Our values define who we are and how we do business. Our values are incorporated in everything we do, these values guide our daily decisions and actions and anchor our policies, goals and practices. To achieve our vision and mission we are guided by the following values.

Integrity - We act with honest and commitment at every stage of operation.

Excellence - We keep our promises and strive to be the best that we can be.

Team work - Great team work requires a shared vision and passion, individuals under effective leadership put the teams interest before individual interest.

WE VALUE The health and safety of our employees is our most critical obligation and the job of everyone at EGL. Our integrity is paramount, people are treated fairly and openly/ transparently and all people & opinions are respected.

SERVICES

Either entirely in-house or in association, EGL offers the following range of engineering services.

Geotechnical Engineering Service

- Foundation Investigation & Design
- Pavement Assessment & Design
- Slope Stability Design
- Centreline Investigation
- Borrow Pit Investigation (Materials Inventory)
- In situ Tests (Plate load test, Panda Tests)
- In situ instrumentation

Geological Engineering Service

- Borehole Investigation & Drilling
- Geophysics Study



TANZANIA

C.1



Certificate of Incorporation of a Company

Section 15

No: 174644624

I HEREBY CERTIFY THAT

EASTERN GEOTECHNICS LIMITED

is this day incorporated under the Companies Act, 2002
and that the Company is Limited.

GIVEN under my hand at Dar es Salaam this **15th** day of **MAY**
TWO THOUSAND AND TWENTY FOUR.



A handwritten signature in blue ink, appearing to read 'Sase'.

PRINC ASST. REGISTRAR OF COMPANIES

CTIN:

1304707



TANZANIA REVENUE AUTHORITY

CERTIFICATE OF REGISTRATION FOR TAXPAYER IDENTIFICATION NUMBER (TIN)

(ISSUED UNDER SECTION 23 OF THE TAX ADMINISTRATION ACT 2015)

THIS IS TO CERTIFY THAT

EASTERN GEOTECHNICS LIMITED

HAS BEEN REGISTERED WITH THE TANZANIA REVENUE AUTHORITY
AND ASSIGNED THE TAXPAYER IDENTIFICATION NUMBER

174-644-624

WITH EFFECT FROM: **15 MAY 2024**

TRA LOCATION: **TEGETA**

TAX OFFICE: **TEGETA**

PHYSICAL LOCATION: **PLOT No. 0 BLOCK No. 0**

STREET / AREA: **MBEZI BEACH A**



**ALFRED T. MREGI
COMMISSIONER FOR DOMESTIC REVENUE**

NOTE: THE REQUIREMENTS UNDER WHICH THIS CERTIFICATE IS ISSUED ARE STATED OVERLEAF



No. 2080

CONTRACTORS REGISTRATION BOARD
CERTIFICATE OF REGISTRATION

This is to Certify that

Eastern Geotechnics Limited

is registered as

SPECIALIST CONTRACTOR

Class Two

Registration No. **SPC2/312/05/2025** Category **Local**

In the field of

Drilling Works

In accordance with the provisions of The Contractors Registration
Act No. 17 of 1997

In witness whereof the common seal has been affixed

hereto on this **9th** day of **May, 2025**


Registrar




Chairman

This Certificate is held subject to the By-laws made under the Act.



THE UNITED REPUBLIC OF TANZANIA

BUSINESS LICENCE

B.L. NO : BL01396912024-2500035577

The Business Licensing Act (Act No. 25 of 1972)

Issuing Office: KINONDONI MUNICIPAL COUNCIL

Tax Identification
No: 174-644-624

License Issued To : EASTERN GEOTECHNICS LIMITED

for the Business of : SPECIALIST CONTRACTOR-CLASS II

Business Location

Region : Dar es Salaam

Ward Kawe

Street Mbezi Beach A

Principal/Branch : PRINCIPAL

Amount of Fee Paid : 800,000.00

Date Of Issue: 2025-05-21

Expiring Date : 2026-05-20



This is Digital Copy does not require a signature of authority

NOTE - This license must be kept in a conspicuous position at the place of business. Any change in the particulars originally registered must be notified to the license Issuer

THE UNITED REPUBLIC OF TANZANIA

00038015

OSHA 18



OCCUPATIONAL SAFETY AND HEALTH AUTHORITY

CERTIFICATE OF REGISTRATION OF A FACTORY/WORKPLACE

I hereby certify that the workplace named below has been duly registered in pursuant of section 17 of The occupational Health and Safety Act Number 5 of 2003 with workplace registration number

214 102 721

Name of the Occupier / Owner

EASTERN GEOTECHNICS LIMITED - HEAD OFFICE

With Effect from **September 29, 2025**

Address and Location: **Plot 1, Block A, Mbezi Beach "A". Kinondoni Municipal Dar es Salaam**

Region : **Dar es Salaam**

District: **Kinondoni**

Ward : **Kawe**

Street / Village: **Mbezi Beach "A"**

Nature of Work : **SPECIALIST CONTRACTOR-CLASS II**

Industrial Classification : **Combined office administrative service activities**

Date of Registration : **29 Sep 2025**

SORT CODE



Khadija H. Mwenda
Chief Inspector

Note THE REQUIREMENTS UNDER THIS CERTIFICATE ISSUED ARE STATED OVERLEAF

EQUIPMENTS.

Drilling Rigs

CAPACITY

The current drilling capacity includes a combination of hand auger tripods and wheel-mounted light weight versatile motorized rotary coring drilling rigs capable of deployment in up to three drilling teams with drilling depth capacities of up to 180m. Our two set of GY150-T series diamond rotary coring drilling rig, supplied ISO 9001:2000 certified, is a two-wheeled lightweight (650kg with power), compact (2.05m X 1.18m X 1.42m), high speed (1100r/min) 22HP powerful machine capable of mineral exploration, geotechnical site investigations and water wells drilling in various diameter boreholes to 180m depths.

We have two GY150-HB series diamond rotary coring drilling rig, similarly supplied ISO 9001:2000 certified, is a two-wheeled medium-weight (800kg), high speed (1100r/min) 22HP powerful machine capable of mineral exploration, geotechnical site investigations and water wells drilling in various diameter (75mm to 200mm) boreholes and to depths up to 180mm. Geotechnical engineering services included with the ground investigation include disturbed and undisturbed sampling of soils, high quality rock coring, water sampling, in-situ ground profile logging, in-situ Standard Penetration Testing (SPT), and others in compliance to the relevant Tanzania, British, American Association of State Highway and Transportation Officials or American Society for Testing and Materials Standards as appropriate.

GY-150T ENGINEERING DRILLING RIG

Features

- 1. Multiple revolving speed grades with large torque meets different project requirements.
- 2. 2-wheels trailer, portable, easy to move by towing the trailer.
- 3. Rotary drilling and cable percussion drilling.
- 4. Spindle can turn 360° range



Technical Figures

DRILLING CAPACITY	Depth 180m / 42
SWIVEL HEAD	
Type	Twin cylinder, Oil-hydraulic feed system,
Angle Range	360°
Stroke of Spindle	450mm
Revolving Speed of Spindle	60 200 400 610 1100 rpm
Max. Spindle Torque	1800N*m
Max. Thrust Capacity	20 kN
Max. Balance Capacity	30 kN
AVAILABLE RODS	42mm, 50mm, AW, BW
HOIST DRUM	
Type	Planetary gear, hand brake type
Hoisting Capacity	24 kN at single pull line
Rope Speed	0.20:0.72:1.26:2.8 m/s at single pull time
Drum Capacity	11mm × 26m
CAT HEAD	132 × 110mm
OIL - HYDRAULIC	
Type	Constant delivery, gear type pump
Delivery Capacity	33L/min @ 1650 r.p.m
POWER	
GY-150T Diesel engine ZS1100,12.1KW at 2200r/min	
Or electronic Motor, 11KW at 1460 r.p.m	
NET WEIGHT	500kgs (without power)
DIMENSION(L × W × H)	2050 × 1180 × 1420mm
Trailer Support	Yes, ladder type drilling mast



GY-150HB ENGINEERING DRILLING RIG


Features

1. Multiple revolving speed grades with large torque meets different project requirements.
2. Frame retraction function for easy connection and replacement to drilling tools.
3. Rotary drilling and cable percussion drilling.
4. Spindle can turn 360° range.
5. With mud pump inbuild.



Technical Figures

DRILLING CAPACITY	Depth 180m / 42
SWIVEL HEAD	
Type	Twin cylinder, Oil-hydraulic feed system, Spindle
Angle Range	360°
Stroke of Spindle	450mm
Revolving Speed of Spindle	60 200 400 610 1100 rpm
Max. Spindle Torque	1800N*m
Max. Thrust Capacity	20 kN
Max. Balance Capacity	30 kN
AVAILABLE RODS	42mm, 50mm, AW, BW
HOIST DRUM	
Type	Planetary gear, hand brake type
Hoisting Capacity	24 kN at single pull line
Rope Speed	0.20:0.72:1.26:2.8 m/s at single pull time
Drum Capacity	11mm × 26m
CAT HEAD	132 × 110mm
OIL - HYDRAULIC	
Type	Constant delivery, gear type pump
Delivery Capacity	33L/min @ 1650 r.p.m
POWER	
GY-150HB Diesel engine ZS1105, 13.2KW at 2200r/min	
Or electronic Motor, 11KW at 1460 r.p.m	
NET WEIGHT	610kgs (without power)
DIMENSION(L × W × H)	2050 × 1180 × 1420mm
Frame Retraction	Retraction 400mm
Mud Pump	100L/min, 1.5Mpa

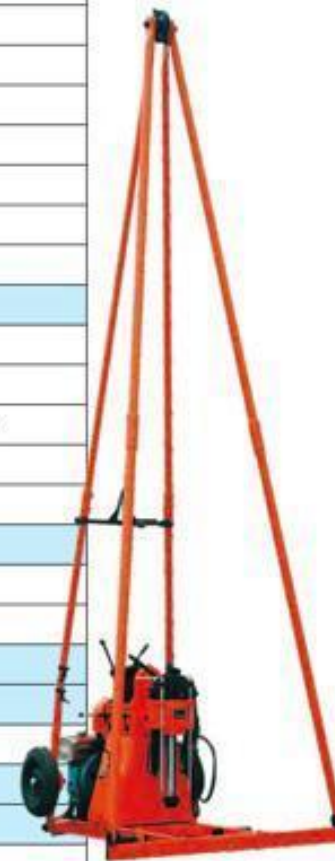

Soil Resistivity Tester and Calibration Certificate

The C.A. 6462 is easy to use, designed specifically for operation in the field. Wherever it is necessary to install an earth connection or characterise an existing earth point, it helps to establish an accurate, fast and reliable diagnosis with optimum comfort and safety.

- 3-in-1 tester: resistivity, earth, coupling between two earths
- measurement range: 0.01 to 2,000 Ω (3 automatic ranges)
- change from 4-wire method to 3-wire method thanks to 1 removable captive bar between E and ES
- 3 fault presence indicators to validate measurement
- measurement frequency: 128Hz
- easy connection of stakes by means of colour-coded terminals
- large backlit digital display with 2,000 counts
- power supply: NiMH rechargeable battery for an average battery life, constantly checked, of 1,180 measurements of 15s each
- IP53 leakproof case with folding cover and carrying handle
- compliant with IEC 61557 -1 et -5
- electrical safety: EN 61010
- dimensions: 273 x 247 x 127 mm - weight: 2.8 kg





CERTIFICATE NO. 100855

Page 1 of 3

TANZANIA BUREAU OF STANDARDS

METROLOGY LABORATORY

CERTIFICATE OF CALIBRATION

This certificate of calibration is issued in accordance with section 4 (1) (b) of the Standards Act No.2 of 2009. The certificate has been issued without any alteration and may not be published other than in full, except with the prior written approval of the Director General of Tanzania Bureau of Standards (TBS), P O Box 9524, Dar es Salaam, Physical Address: Morogoro / Sam Nujoma Road, Ubungo. Tel. +255 22 2450206, Dir. +255 22 2450298, Fax No. +255 22 2450959

IDENTIFICATION

EQUIPMENT:	EARTH & RESITIVITY TESTER
MANUFACTURER:	CHAUVIN ARNOUX GROUP
SERIAL NUMBER:	689327A00
MODEL:	691822A00
IDENTIFICATION NUMBER:	C.A 6462
RANGE:	0Ω TO 2000Ω
READABILITY:	VARIES WITH RANGE
TBS JOB NUMBER:	2024-481
LOCATION OF CALIBRATION:	BA004
DATE OF CALIBRATION:	2025-08-07
DATE OF ISSUE:	2025-09-09
CALIBRATED FOR:	EASTERN GEOTECHNICS LIMITED P.O.BOX 32215 DAR ES SALAAM

Calibrated by:

I. Machele

Metrologist

Checked by:

E. Jinasa

Metrologist

Approved by:

S. Mrosso

Metrology Manager

VALIDITY OF CALIBRATION

The values in this certificate are correct at the time of calibration. Subsequently the accuracy will depend on such factors as the care exercised in handling and use of the instrument and the frequency of use. Recalibration should be performed after a period which has been chosen to ensure that the instrument's accuracy remains within the desired limits. The result applies only to the equipment specified in this document.



CERTIFICATE NO. 100855

Page 2 of 3

1. CALIBRATION CONDITIONS

The calibration was carried out at an ambient temperature of 21 °C and at a relative humidity of 60 %rH.

2. EQUIPMENTS AND STANDARDS USED

Portable calibrator of s/n VO1861K21 with certificate number 45008

Thermo Hygrometer Serial Number C19994 with sensor serial number C19063 with Certificate number NIMISA-TEM-2023-4179 valid up to October 2026.

3. CALIBRATION PROCEDURE

The Earth ground tester was calibrated by using method number TBS/DTM/MET – ELE -R01

4. TRACEABILITY

The Equipment and Standards used in the measurement are traceable to NMISA with certificate number DCLFVG – 4242.

5. RESULTS

RESISTANCE MEASUREMENT

RANGE RESISTANCE	APPLIED RESISTANCE	UUT READING	CORRECTION	UNCERTAINTY OF MEASUREMENT
(Ω)	(Ω)	(Ω)	(Ω)	(Ω)
10	10,000	9,90	+0,10	$\pm 0,01$
100	99,99	97,0	+2,99	$\pm 0,1$
500	500,00	562	-62,00	± 1
1K	999,95	980	19,95	± 1

Calibrated by:

I. Machele

Metrologist

Checked by:

E. Jinasa

Metrologist

Approved by:

S. Mrosso

Metrology Manager



CERTIFICATE NO. 100855

Page 3 of 3

6. UNCERTAINTY

- 6.1 The reported uncertainty of the measurement was calculated in accordance with the BIPM, IEC, ISO, IUPAP, OIML document entitled "Guide to the Expression of Uncertainty in Measurement (International Organisation for Standardisation, Geneva, Switzerland, 2008)".
- 6.2 The reported expanded uncertainty of the measurement is stated as the standard Uncertainty of the measurement multiplied by a coverage factor of $k=2$, which for a Normal distribution approximates a level of confidence of 95%.

7. REMARKS

- 7.1 UUT means the unit under test.
- 7.2 CORRECTION is the value that should be **added** to a UUT value to get a true value

=END OF CERTIFICATE=

Calibrated by:

A handwritten signature in blue ink, appearing to read "I. Machele".

I. Machele

Metrologist

Checked by:

A handwritten signature in blue ink, appearing to read "E. Jinasa".

E. Jinasa

Metrologist

Approved by:

A handwritten signature in blue ink, appearing to read "S. Mrosso".

S. Mrosso

Metrology Manager

List of all similar projects over the past three (3) years.

Project Title	Client	Location	Year	Scope of works
Geotechnical Site Investigation For Tailing Storage Facility & Foundation Structures for CIP.	Bureau of Industrial Cooperation (BICO) Under University of Dar es salaam representing Mara Mining Limited	North Mara	2025	9 boreholes drilling to 10m deep, sampling & SPT Testing, Soakaway Testing, Permeability Test, Dynamic Probe Light (DPL), Laboratory Works and Geotechnical Report.
Geotechnical Investigation For Ctfm Slipway.	Moe Hemani	Slipway Masaki	2025	3 boreholes drilling to 6m deep, sampling & SPT Testing, Laboratory Works and Geotechnical Report.
Geotechnical Investigation for the Proposed Construction of Serengeti Tented Lodge.	SERENGETI TENTED LODGE.	Serengeti.	2025	20 Nos Trial Pit Excavation, sampling, DPL Testing Laboratory Testing and Geotechnical Report.
Geotechnical Investigation For Rehabilitation Works - Dar Es Salaam Port Construction Of General Cargo Yard And Material Handling Yard	Dove Engineering representing DP World	Dar es salaam Port	2025	5 boreholes drilling to 20m deep, sampling & SPT Testing, Seismic refraction Testing, Laboratory Works and Geotechnical Report.
Geotechnical Investigation For The Proposed Construction Of Puma Urban Station To Be Built On Plot No.3, Block S At Ukuni Area, Bagamoyo Urban.	KIOTA Architects P.O.Box 35898, Kinondoni Dar es salaam. On behalf of Puma Energy (T) Ltd P.O.Box 9043 Dar es salaam.	Ukuni Area, Bagamoyo.	2025	3 boreholes drilling to 10m deep, sampling & SPT Testing, Electrical Resistivity Testing, Laboratory Works and Geotechnical Report.
Zanzibar Sector Transformation And Access Project (Zesta) Lot 2 132kv/33kv.	Zanzibar Electricity Corporation (ZECO)	Welezo, Makunduchi And Matemwe	2025	18 Nos Earth Resistivity Test For Welezo, Makunduchi And Matemwe Substation.
Geotechnical Site Investigation for Engineering Design, Supply, Installation, Testing And Commissioning Of New 400 Kv Shinyanga Substation In Shinyanga Region, Tanzania.	TANZANIA ELECTRIC SUPPLY COMPANY LIMITED (TANESCO).	Shinyanga Substation	2025	Earth Resistivity & Dpl Testing Report
TOPOGRAPHICAL SURVEY FOR ENGINEERING DESIGN, SUPPLY, INSTALLATION, TESTING AND COMMISSIONING OF NEW 220kv SINGIDA TRANSMISSION LINE AT SINGIDA	TANZANIA ELECTRIC SUPPLY COMPANY LIMITED (TANESCO).	Singida Substation	2025	Topographical Survey.
Geotechnical Investigation For Proposed Construction Of Castello Hotel In Paje Zanzibar.	Castell Holdings Holdings Company Limited	Paje Zanzibar	2025	8 boreholes drilling to 10m deep, sampling & SPT Testing, Laboratory Works and Geotechnical Report.
Geotechnical Investigation For Proposed Reconstruction Of &Beyond Ngorongoro Crater Lodge.	&Beyond Tanzania Limited. Haile Selassie Road Plot No. 52 House No.10.	Ngorongoro	2025	15 Nos Trial Pit Excavation, sampling, DPL Testing Laboratory Testing and Geotechnical Report.
Geotechnical Investigation For Multistorey Building At Kisota -Kigamboni Dar Es Salaam.	KHALFAN MANSOUR MOHAMED	Dar es salaam	2025	3 Boreholes Drilling to 10m deep, sampling & SPT Testing, Laboratory Works and Geotechnical Report.
Proposed Construction Of The Tcaa Liason Office On Plot. No 22, Block 31, Area C, Dodoma Capital City.	TANZANIA CIVIL AVIATION AUTHORITY (TCAA). P.O. Box 2819, Dar es salaam. Tel: +255 22 219 8100 Email:tcaa@tcaa.go.tz	Dodoma	2024	3 Boreholes Drilling to 10m deep, sampling & SPT Testing, Laboratory Works and Geotechnical Report.

Project Title	Client	Location	Year	Scope of works
Geotechnical Investigation For Proposed Construction Of Zumve 100m ³ On Ground Storage Tank (Booster Station), Masekelo 200m ³ Onground Tank And Imesela 300m ³ Uphill Ground Storage Tank.	Lifewater International P.O Box 1196, Shinyanga, Tanzania,	Shinyanga	2024	Trial Pit Excavation, sampling, DPL Testing Laboratory Testing and Geotechnical Report.
Geotechnical Investigation For Proposed Nkonkilangi Bridge Along Matanda - Konkilangi Road Final Draft, In Iramba - Singida Tanzania.	JP Traders Limited P.O.Box 76007 Dar es salaam	Singida	2024	6 Boreholes Drilling to 30m deep, sampling & SPT Testing, Centre line Survey for pavement design Laboratory Works and Geotechnical Report.
Geotechnical Investigation For Proposed Masagi Bridge Along Masagi - Tyeme Road Final Draft, In Iramba - Singida Tanzania Contract No. S10/023/2024/W/106.	JP Traders Limited P.O.Box 76007 Dar es salaam	Singida	2024	2 Boreholes Drilling to 25m deep, sampling & SPT Testing, Laboratory Works and Geotechnical Report.
Geotechnical Investigation For Proposed Sagasa Bridge Along Kwaluguru - Kiberashi Road Final Draft, In Handeni - Tanga Tanzania.	JP Traders Limited P.O.Box 76007 Dar es salaam	Tanga	2024	2 Boreholes Drilling to 15m deep, sampling & SPT Testing, Laboratory Works and Geotechnical Report.
EPC project of 1.65MW Hydropower Plant of KIKULETWA Renewable Energy Training and Research Center, HAI District, Kilimanjaro Region, Tanzania	White City International on behalf of Arusha Technical College	Moshi	2024	5 Boreholes Drilling to 25m deep, sampling & SPT Testing, Seismic Test, Resistivity Tests and Laboratory Works and Geotechnical Report.
Integration of Existing Kigoma / Kasulu 33kV Distribution Networks to The Main Grid, LV Lines Including MV / LV Distribution Transformers In Kigoma Region-Lot-2 Contract No.: PA/001/2021-22/HQ/W/025 - LOT-2	WEGEO T LIMITED on behalf of Shine Technology Consortium	Kigoma and Kasulu	2024	10 Boreholes Drilling to 15m deep, sampling & SPT Testing, Resistivity Tests, DPL, Trial Pitting, Laboratory Works and Geotechnical Report.
Geotechnical Site Investigation For Proposed Design And Construction Of Centre For Innovation And Technology Transfer (Citt), Academic Building And Workshop At Mbeya University Main Campus.	K&M Archplan (T) Ltd On Behalf of The Vice Chancellor, Mbeya University of Science and Technology, Mbeya (MUST) P. O Box 131, Mbeya, Tanzania.	Mbeya	2023	5 Boreholes Drilling to 25m deep, sampling & SPT Testing, Centre line Survey for pavement design, Laboratory Works and Geotechnical Report.
Geotechnical Investigation For The Proposed Construction Of Underground Water Treatement Tank,	Tanzania Took Garment Co. Ltd, Benjamin Mkapa Export Processing Zone P.O.Box 12112, Dar es Salaam, Tanzania.	Dar es salaam	2023	3 Boreholes drilling to 25m deep, Laboratory Works and Geotechnical Report.
Geotechnical Investigtion For Proposed Construction Of Workshop At 82 Regiment Old Shinyanga.	JWTZ 82 Regiment Old Shinyanga.	Shinyanga	2023	2 Borehole Drilling to 15m deep, Soil resistivity test Laboratory Works and Geotechnical Report.
Geotechnical Investigation For The Proposed Construction Of Tanzania Tooku Garment Staff Quoters,	Tanzania Took Garment Co. Ltd, Benjamin Mkapa Export Processing Zone P.O.Box 12112, Dar es Salaam, Tanzania	Dar es salaam	2023	3 Borehole Drilling to 10m deep, Laboratory Works and Geotechnical Report.
Proposed Cormmercial House To Be Built On Plot No 31 Block Z, Bungoni Street At Ilala Municipality In Dar Es Salaam.	Mrs Hindun Abdallah Faraji, P. O Box 8558, Dar es Salaam, Tanzania.	Dar es salaam	2023	2 Boreholes drilling to 10m deep, Laboratory Works and Geotechnical Report.
Geotechnical Survey For Contract Administration For Design And Construction Supervision Of Proposed Construction Of Tira Building On Plot No "B" Block "G" Njedengwa Area Dodoma City.	K&M Archplan (T) Ltd On Behalf of The Vice Chancellor, on behalf of Tanzania Insurance Reguratory Authority (TIRA), P. O Box 2987, Dodoma, Tanzania..	Dodoma	2023	3 Boreholes drilling to 10m deep, Laboratory Works and Geotechnical Report.

Project Title	Client	Location	Year	Scope of works
PROPOSED CONSTRUCTION OF SILOS AT 21st FOOD AND PACKAGING LTD PLOT.	21st Century Food and Packaging Ltd, P. O Box 20660, Dar es Salaam, Tanzania.	Dar es salaam	2022	3 Boreholes drilling to 12m deep, Laboratory Works and Geotechnical Report.
Geotechnical Investigation For Proposed Construction Of Water Storage Tank (60m3) Capacity, Ground Tank For Bugogo Village Water Supply Project, Shinyanga Dc.	LifeWater P.O Box 1196, Shinyanga, Tanzania.	Shinyanga	2022	DPL, Trial Pits, Laboratory Works and Geotechnical Report.
Geotechnical Investigation For Proposed Construction Of 8 Storey Residential Building At Sinza Makaburini Dar Es Salaam.	Mr. Mosses Kiduduye.	Dar es salaam	2022	3 Boreholes drilling to 10m deep, Laboratory Works and Geotechnical Report.
Geotechnical Investigation for Proposed Construction of Residential Building To Be Built On Block No. 196 Plot No. 6 At Mbweni-Jkt, Kinondoni, Dar Es Salaam.	Mr.Majid Mvule, P. O. Box 61552, Dar es Salaam. Tanzania.	Dar es salaam	2022	3 Boreholes drilling to 8m deep, Laboratory Works and Geotechnical Report.
Proposed Extension Of Main Area And Existing Bedrooms At Grumeti Tented Lodge At Serengeti In Mara Region.	AndBeyond Tanzania Ltd. Haile Selassie Road, Plot No. 52, House No. 10, Arusha.	Serengeti	2022	Trial pits, DPL, Laboratory Works and Geotechnical Report.